

## **Remarks**

Applicants acknowledge receipt of the Office Action mailed June 4, 2003. Applicants respectfully submit that the present Response and Amendment is a reply to every ground of objection or rejection raised in the Office Action and places the application in condition for allowance. The following remarks address the objections, rejections and comments made by the Examiner in the order that the objections, rejections and comments appear in the Office Action mailed June 4, 2003.

## **Supplemental Information Disclosure Statement**

With the Office Action, the Examiner indicated on the Supplemental Information Disclosure Statement that no copy of pages 273 through 277 of the reference Polymer Blends and Composites was provided. Applicants submit with this response a copy of pages 273 through 277 of the reference Polymer Blends and Composites.

## **Paragraph no. 1 of the Office Action**

Claims 3, 4, 8-12 15, 17, 32 and 34 were with drawn from further consideration because there was not an allowable generic or linking claim. Applicants submit that generic or linking claims are now allowable, specifically Claims 1 and 28 are allowable. Applicants request that Claims 3, 4, 8-12 15, 17, 32 and 34 be rejoined at this time.

## **Paragraph no. 2 of the Office Action**

The abstract was objected to because the term "means" was included in the Abstract. By this amendment, Applicants removed the term "means" from the abstract (by substitute specification) to expedite allowance of the present patent application. Accordingly, Applicants submit that the abstract is in proper form and the objection to the abstract should be withdrawn.

## **Paragraph nos. 3 and 4 of the Office Action**

Proposed drawing changes are included in this response as REPLACEMENT SHEETS for drawing sheets 1-3. Optional Annotated Sheets Showing Changes have also been included with this Response for the Examiner.

In paragraph no. 4, the Examiner noted that **37** and **39** are not illustrated in the drawings. The drawings have been amended to indicate the locations of bodyside liner or topsheet **37** and outercover or backsheet **39** in Figure 4.

In paragraph no. 4 of the Office Action, the Examiner also remarked that the valve **28** should be closed upon inflation. The Examiner suggested inflation is illustrated in Figure 3. Applicants agree and the specification states that valve **28** is opened upon inflation and closed upon deflation of the bellows. However, Figure 3 can be interpreted as showing the bellows in an expanded, inflated condition but still being inflated. Thus, valve **28** may still be open as illustrated. Accordingly, Applicants submit that the specification and the drawings were not necessarily inconsistent. However, Applicants have amended Figure 3 to expedite allowance of the present application.

In paragraph no. 4, the Examiner also noted that numeral **32** as shown in Figure 5 does not appear to denote a connections means. Applicants have amended Figure 5 to more clearly indicate means for connecting **32** on Figure 5. Applicants also amended Figure 5 to illustrate a small battery operated pump unit **50** and optional tubing optional tubing **54** connected to means for connecting **32** as described on page 12, lines 4-10 of the SUBSTITUTE SPECIFICATION. Applicants submit that the pump unit and optional tubing were described in the Specification as files and, thus, are not new matter.

#### **Paragraph no. 5 of the Office Action**

In paragraph no. 5, the drawings were objected to because a topsheet, backsheet, connection means and bellows are not shown. In order to facilitate allowance of the present application, Applicants hereby submit REPLACEMENT SHEETS and optional Annotated Sheets Showing Changes to the drawings showing the proposed changes to Figure 4 that are marked in yellow and that illustrate a topsheet **37** and a backsheet **38**. Applicants submit that support for the changes in the drawings can be found in at least the following passage which can be found in the first paragraph of the Background on page 1 of the present application. "The most basic design of all such articles typically includes a bodyside liner, an outercover and an absorbent core disposed between the bodyside liner and the outercover. Generally, the bodyside liner and the outercover are sealed about the periphery so as to encapsulate the absorbent core and thus make it possible to entrap and retain any fluids contained within the absorbent core." Applicants previously amended the specification on page 11 to include the following: "The diaper 36 includes a bodyside liner or topsheet 37 and an outercover or backsheet 39 which are sealed about the periphery so as to encapsulate an absorbent core (not shown)."

Applicants respectfully submit that a means for connecting is shown as **32** on Figure 5 and bellows as **20** on Figure 4.

Applicants submit that all of the objections to the drawings and related objections are resolved by the amendments to Figures 3, 4 and 5.

**Paragraph no. 6 of the Office Action**

In paragraph no. 6, the Summary was objected to because a desiccant on the inside of the means for valving is referred to in the Summary but is not claimed. By this Response and Amendment, Applicants have removed the statement that a desiccant is on the inside of the means for valving from the Summary.

In paragraph no. 6, the Examiner also objected to the use of the term “STARRET-type”. Applicants have amended this patent application to remove “-type” from STARRET.

In paragraph no. 6, the Examiner also objected to the use of the numerals **24**, **28** and **32**. With this Response and Amendment, Applicants have amended the Figures to more specifically point out the means for connecting **32** on Figure 5 and valve **28** closed upon inflation as suggested by the Examiner.

The Examiner comments in paragraph no. 6 regarding the proper “means for” format are acknowledged. Applicants respectfully submit that legal interpretation of “means for” format claim scope is determined by the courts and have corrected the amendment attempted in the last response with the attached SUBSTITUTE SPECIFICATION. Further, Applicants have amended the Specification and Claims to the “means for” format suggested by the Examiner as discussed below.

**Paragraph nos. 7 and 8 of the Office Action**

In paragraph no. 7, the Examiner objected to the means format used by Applicants. By this Response and Amendment, Applicants have amended the means format thorough the specification and claims in the attached SUBSTITUTE SPECIFICATION and amended claims to invoke 35 USC 112 sixth paragraph. Specifically, Applicants have amended the Specification and Claims as follows. All mention of the terms “valving means” have been amended to “means for valving”. All mention of the terms “connection means” have been amended to “means for connecting”. All mention of the terms “pumping means” have been amended to “means for pumping”. All mention of the terms “distribution means” have been amended to “means for distributing”. And, all mention of “manual or mechanically assisted means for passing air” to “means for manually or mechanically assisting passing air”.

**Paragraph no. 9 of the Office Action**

The amendment suggested by the Examiner was made in this Response.

**Paragraph nos. 10-18 of the Office Action**


Claims 1, 2, 5-7, 13, 14, 16, 18-31 and 33 were rejected under 35 U.S.C §102(e) as being anticipated by U.S. Patent No. 6,454,749 to Lau et al. (hereinafter "Lau"). For the purposes of advancing prosecution, Applicants submit herewith a terminal disclaimer over U.S. Patent No. 6,454,749 thereby rendering the rejection moot. However, by the filing of such terminal disclaimer, Applicants' submission of the terminal disclaimer should not hereby be interpreted as admitting the prior art status of such reference or its materiality.

**Conclusion**

For the above-stated reasons, the application, figures and claims are believed to be in condition for allowance and a Notice of Allowance is respectfully requested. Should any questions arise with regard to this application the Examiner is encouraged to contact the undersigned at (770)-587-8620. Please charge any prosecutorial fees which are due to Kimberly-Clark Worldwide, Inc. deposit account number 11-0875.


Respectfully submitted,

J. Davis et al.

By:   
Christos S. Kyriakou  
Registration No.: 42,776  
Attorney for Applicants.

**CERTIFICATE OF MAILING**

I, Christos S. Kyriakou, hereby certify that on September 4, 2003 this document is being deposited with the United States Postal Service as first-class mail, postage prepaid, in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231.

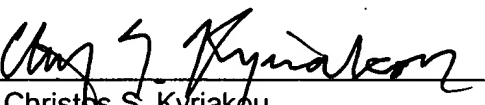By:   
Christos S. Kyriakou



EXPRESS MAIL NO.: EE546663937US

Docket : 16,234

## **ABSORBENT ARTICLE WITH DYNAMIC AIR FLOW**

### **FIELD OF THE INVENTION**

The present invention relates to an air moving structure in an article for personal care like diapers, training pants, swimwear, absorbent underpants, adult incontinence products, wound dressings, bandages, feminine hygiene products, and absorbent pads or the like.

### **BACKGROUND OF THE INVENTION**

Absorbent articles include such items as personal care products, and more specifically diapers, training pants, swimwear, wound dressings, bandages, incontinence garments, absorbent pads and feminine hygiene products such as sanitary napkins, panty-liners and tampons and the like. The most basic design of all such articles typically includes a bodyside liner, an outercover and an absorbent core disposed between the bodyside liner and the outercover. Generally, the bodyside liner and the outercover are sealed about the periphery so as to encapsulate the absorbent core and thus make it possible to entrap and retain any fluids contained within the absorbent core. Depending upon the design of the particular personal care absorbent article, other components also may be included. Thus, the product may include such things as elastic side panels, fluid containment flaps, fastening devices and other layers of fluid transfer or retention materials.

The lack of air flow into personal care products has been a long standing concern because of adverse skin effects which are believed to be promoted by continuous exposure to moisture and the enzymes and other substances in bodily fluids. Many attempts to correct these adverse effects have been made, including the provision of materials designed to wick and hold liquids away from the skin, or to increase the breathability or air permeability of the personal care product components. Breathable diaper outercovers, for example, have been developed to allow increased air exchange and flow into the product and so improve the environment adjacent the skin. The condition of the wearer's skin is thus an area of continuing concern to the personal care product industry.

RECEIVED  
SEP 11 2003  
TECHNOLOGY CENTER R3700

In light of low air flow within absorbent articles, more specifically personal care products, even those with breathable outer covers, it is an object of this invention to provide a dynamically breathable personal care product wherein air may be forced into or extracted from the product in the region between the skin and the product. Dynamic breathability, i.e., the forcing of air into a product, should not be confused with the provision of breathable materials which merely allow air to pass through them in a passive fashion.

It is a further object of this invention to provide a dynamically breathable absorbent article having a means for valving means comprising at least one valve and a ~~connection~~ means for connecting which permits the connecting of a means for pumping means, wherein the means for valving means allows air to be distributed into or drawn from one or more regions of the article. It is a further object of the present invention that a means for pumping means can be attached or fixed to the absorbent article or external thereto. It is also an object of the present invention to utilize a means for valving means or means for pumping means containing a desiccant so as to further reduce the relative humidity of the air being forced into or extracted from the absorbent article.

### **SUMMARY OF THE INVENTION**

The present invention relates to an absorbent article comprising a topsheet, a backsheet, and a means for valving means, the means for valving means comprising at least one one-way valve and a ~~connection~~ means for connecting which permits the connecting of a means for pumping means, wherein the means for valving means allows air to be distributed into one or more regions of the article. The means for valving means of the article allows air to be discharged into the article in a region between a wearer's skin and the product. In one embodiment, the present invention may further include a pump or means for pumping means, the pump or means for pumping means being any manual or mechanically assisted means for passing air through the ~~connection~~ means for connecting of the absorbent article. Desirably, the ~~connection~~ means for connecting is located in the periphery of the absorbent article and the discharge of the means for valving means is desirably directed into the absorbent article so air is forced into the product in the region between the skin and the product, which is generally remote from a fresh air source.

Additionally, the means for valving means of the absorbent article and/or the means for pumping means, if present, may contain a desiccant ~~on the inside portions thereof~~. The addition of a desiccant in the means for valving and/or means for pumping

~~means~~ may act to further reduce the relative humidity of the air passing into the absorbent article, thereby allowing for the removal of more moisture from the article as the air having a reduced humidity is passed into or through the article.

### **BRIEF DESCRIPTION OF THE DRAWINGS**

Figure 1 shows a one way valve.

Figure 2A and 2B show a one way valving mechanism using two pliant sheets in a cross-sectional view.

Figure 3 shows a bellows with a resilient component within.

Figure 4 shows an outside view of one example of a diaper with a means for pumping ~~means~~ incorporated.

Figure 5 shows a view of the inside of the diaper of Figure 4.

### **DEFINITIONS**

As used herein, the term “air” is intended to include any gas or gaseous combination (e.g. atmospheric air, oxygen or the like) which may be passed through tubing and which may come into contact with the human body.

As used herein, the term “**biconstituent fibers**” refers to fibers which have been formed from at least two polymers extruded from the same extruder as a blend. The term “blend” is defined below. Biconstituent fibers do not have the various polymer components arranged in relatively constantly positioned distinct zones across the cross-sectional area of the fiber and the various polymers are usually not continuous along the entire length of the fiber, instead usually forming fibrils or protofibrils which start and end at random. Biconstituent fibers are sometimes also referred to as multiconstituent fibers. Fibers of this general type are discussed in, for example, US Patent 5,108,827 to Gessner. Bicomponent and biconstituent fibers are also discussed in the textbook Polymer Blends and Composites by John A. Manson and Leslie H. Sperling, copyright 1976 by Plenum Press, a division of Plenum Publishing Corporation of New York, ISBN 0-306-30831-2, at pages 273 through 277.

As used herein the term “**blend**” means a mixture of two or more polymers while the term “alloy” means a sub-class of blends wherein the components are immiscible but have been compatibilized. “Miscibility” and “immiscibility” are defined as blends having negative and positive values, respectively, for the free energy of mixing. Further, “compatibilization” is defined as the process of modifying the interfacial properties of an immiscible polymer blend in order to make an alloy.

As used herein and in the claims, the term “**comprising**” is inclusive or open-ended and does not exclude additional unrecited elements, compositional components, or method steps.

As used herein, the term “**conjugate fibers**” refers to fibers which have been formed from at least two polymers extruded from separate extruders but spun together to form one fiber. Conjugate fibers are also sometimes referred to as multicomponent or bicomponent fibers. The polymers are usually different from each other though conjugate fibers may be monocomponent fibers. The polymers are arranged in substantially constantly positioned distinct zones across the cross-section of the conjugate fibers and extend continuously along the length of the conjugate fibers. The configuration of such a conjugate fiber may be, for example, a sheath/core arrangement wherein one polymer is surrounded by another or may be a side by side arrangement, a pie arrangement or an “islands-in-the-sea” arrangement. Conjugate fibers are taught in US Patent 5,108,820 to Kaneko et al., US Patent 5,336,552 to Strack et al., and US Patent 5,382,400 to Pike et al. For two component fibers, the polymers may be present in ratios of 75/25, 50/50, 25/75 or any other desired ratios. The fibers may also have shapes such as those described in US Patents 5,277,976 to Hogle et al., and 5,069,970 and 5,057,368 to Largman et al., hereby incorporated by reference in their entirety, which describe fibers with unconventional shapes.

As used herein, the term “**disposable**” includes being disposed of after a single use and not intended to be washed and reused.

“**Front**” and “**back**” are used throughout this description to designate relationships relative to the garment itself, rather than to suggest any position the garment assumes when it is positioned on a wearer.

As used herein, the terms “**inward**” and “**outward**” refer to positions relative to the center of an absorbent garment, and particularly transversely and/or longitudinally closer to or away from the longitudinal and transverse center of the absorbent garment.

“**Feminine hygiene products**” means sanitary napkins or pads, tampons and panty-liners.

As used herein, the term “**liquid**” means a non-particulate substance and/or material that flows and can assume the interior shape of a container into which it is poured or placed.

As used herein, the term “**liquid communication**” means that liquid is able to travel from one layer to another layer, or one location to another within a layer.

As used herein, the terms “**longitudinal**” and “**transverse**” have their customary meanings. The longitudinal axis lies in the plane of the article when laid



flat and fully extended and is generally parallel to a vertical plane that bisects a standing wearer into left and right body halves when the article is worn. The transverse axis lies in the plane of the article generally perpendicular to the longitudinal axis. The article as illustrated is longer in the longitudinal direction than in the transverse direction.

As used herein the term “**nonwoven fabric or web**” means a web having a structure of individual fibers or threads which are interlaid, but not in an identifiable manner as in a knitted fabric. Nonwoven fabrics or webs have been formed from many processes such as for example, meltblowing processes, spunbonding processes, and bonded carded web processes. The basis weight of nonwoven fabrics is usually expressed in ounces of material per square yard (osy) or grams per square meter (gsm) and the fiber diameters useful are usually expressed in microns. (Note that to convert from osy to gsm, multiply osy by 33.91).

As used herein, the term “**target area**” refers to the area or position on a personal care product where an insult is normally delivered by a wearer.

### **TEST METHODS**

**Material caliper (thickness):** The caliper of a material is a measure of thickness and is measured at 0.05 psi with a STARRET-type bulk tester, in units of millimeters.

**Density:** The density of the materials is calculated by dividing the weight per unit area of a sample in grams per square meter (gsm) by the bulk of the sample in millimeters (mm) at 68.9 Pascals and multiplying the result by 0.001 to convert the value to grams per cubic centimeter (g/cc). A total of three samples would be evaluated and averaged for the density values.

### **DETAILED DESCRIPTION OF THE INVENTION**

Personal care absorbent articles include such items as diapers, training pants, swimwear, feminine hygiene products such as sanitary napkins, panty-liners and tampons, incontinence garments and devices, wound dressings, bandages, absorbent pads and the like. The most basic design of all such articles typically includes a bodyside liner, an outercover and an absorbent core disposed between the bodyside liner and the outercover.

The lack of air flow into personal care products has been a long standing concern because of adverse skin effects which are believed to be promoted by continuous exposure to moisture, high temperatures and the enzymes and other

substances in bodily fluids. Many attempts to correct these adverse effects have been made, including the provision of materials designed to wick and hold liquids away from the skin, or to increase the breathability or air permeability of the personal care product components. Breathable diaper outercovers, for example, have been developed to allow increased air exchange and flow into the product and so improve the environment adjacent the skin.

In light of the low air flow within personal care products, it is an object of this invention to provide a dynamically breathable personal care product wherein air is drawn from or forced into the product in the region between the skin and the product. Dynamic breathability, i.e., the forcing of air into and/or the evacuation of air from a product, should not be confused with the provision of breathable materials which merely allow air to pass through them in a passive fashion.

A personal care product, for example an incontinence garment, typically has a bodyside layer, optionally a fluid transfer layer, a fluid retention layer and a garment side layer. It may also have a distribution layer or other optional layers to provide specialized functions.

The bodyside layer is sometimes referred to as a bodyside liner or topsheet. In the thickness direction of the article, the liner material is the layer against the wearer's skin and so the first layer in contact with liquid or other exudate from the wearer. The liner further serves to isolate the wearer's skin from the liquids held in an absorbent structure and should be compliant, soft feeling and non-irritating.

The bodyside liner can be surface treated with a selected amount of surfactant, such as at least about 0.1 wt % Ahcovel surfactant with respect to the weight of the liner, or otherwise processed to impart the desired level of wettability and hydrophilicity. If a surfactant is used, it can be an internal additive or applied to the layer by any conventional means, such as spraying, coating and the like, prior to the deposition of the next layer. Desirably the surfactant will present in an amount from about 0.2 wt % to 0.8 wt %.

The fluid retention layer should absorb liquid from the adjacent bodyside layer in a controlled manner such that liquid may be stored away from contact with the body. Retention materials generally comprise binder, synthetic fibers and natural fibers. While any of the layers of a personal care product may optionally contain a superabsorbent, the fluid retention layer is the most logical layer to contain such a component.

The garment side liner layer, also referred to as a backsheet or outer cover is the farthest layer from the wearer. The outer cover functions to prevent body exudates contained in an absorbent structure from wetting or soiling the wearer's

clothing, bedding, or other materials contacting the personal care product. The outer cover has traditionally been formed of a thin thermoplastic film, such as polyethylene film, which is substantially impermeable to liquid but may optionally be composed of a vapor or gas permeable, microporous "breathable" material, that is permeable to vapors or gas yet substantially impermeable to liquid.

The optional fluid transfer layer, also referred to as a surge layer, is most typically interposed between and in intimate, liquid communicating contact with the bodyside liner and another layer such as a fluid distribution or retention layer. The fluid transfer or surge layer allows fluid movement through itself generally in the Z-direction, i.e. away from the bodyside and towards the garment side.

An optional distribution layer may be interposed above (toward a wearer) the fluid retention layer and should be capable of moving fluid from the point of initial deposition to where storage is desired. The fluid distribution layer, therefore, in addition to allowing fluid movement through itself in the Z-direction, also moves fluid in the X and Y directions. Distribution should take place at an acceptable rate such that the target insult area, generally the crotch area, is ready for the next insult. The time between insults can range from just a few minutes to hours, generally depending on the age of the wearer and the personal care product in question.

The breathable outercover discussed above is an example of the approach which has been used previously to increase the ability of air to enter the product. The breathable outercover allows air through, and, in bench testing, can provide good air flow rates as measured by conventional ASTM permeability testing. While a breathable outercover will permit air to flow through, in actual use there is no way to guarantee the flow of air through the product and all the way to the skin, since this method is entirely passive. The dynamic air flow provision remedies this by avoiding the exclusive reliance on passive air entry and forcing or drawing air into the product into the region between the skin and the product.

Another aspect of the invention is a means for valving means which comprises at least one one-way valve and a ~~connection~~ means for connecting. The ~~connection~~ means for connecting allows for the connecting of a pump or means for pumping means and is desirably located in the periphery of the product. One location for the ~~connection~~ means for connecting is in the waist area, preferably as high on the product as possible, in, for example, a diaper, training pant or incontinence garment. Another suitable location for the ~~connection~~ means for connecting is in the leg area of, for example, a sanitary napkin, diaper, training pant or incontinence garment. Finally, in an absorbent pad, such as those which may be used on a bed or gurney, in a hospital or other care facility, the ~~connection~~ means for connecting may located in any portion of

the periphery of the product, but is desirably located in a position readily accessible to the wearer or third party responsible for attaching or detaching the pump or means for pumping means from the absorbent article. Although the ~~connection~~ means for connecting may be located anywhere on the absorbent article it is desirable that the ~~connection~~ means for connecting be in a location which is readily accessible when the product is in use, that will not significantly hinder or adversely affect the wearer's range of motion or activities, and which will not be uncomfortable to the wearer or user of the product when the pump or means for pumping means is attached thereto. It is also desirable depending on the product involved that the location of ~~connection~~ means for connecting be such that it allows for the discrete attachment of a pump or means for pumping means.

The pump or means for pumping means, which need not be part of the article, may comprise any means for manual manually or mechanically assisting assisted ~~means for~~ passing air through the ~~connection~~ means for connecting of the absorbent article. Any means for manual manually or mechanically assisting assisted ~~means for~~ passing air through the ~~connection~~ means for connecting of the absorbent article may include, but is not limited to, any conventional pump or means for pumping means, such as a bellows, a vacuum means or other suction or evacuation device. The pump or means for pumping means desirably is self contained, but may also include tubing or piping attached to an air supply or suctioning device such as the ports found in a patient's room in a hospital or a cylinder of air, such as an oxygen tank or the like, which may be stationary or portable. For example, it is envisioned that a wearer of the product may need an supplemental air supply (e.g. supplemental oxygen), due to a medical condition or procedure, and that a split or a "Y" could be inserted into the tube connecting the air supply to the wearer's breathing device and that a portion of the air could be directed to the ~~connection~~ means for connecting of the absorbent article via a second tube connected to the "Y" in the supply tube.

It is contemplated that the means for pumping means may be activated by the wearer or by a third party. Desirably the means for pumping means is also remotely or programably operated. It is contemplated that the means for pumping means may include a conventional pump (manual or automated), the scale of which could vary from a finger operable pump or hand pump up to a large mechanically driven compressor or means for pumping means. Furthermore, it is desirable for the means for valving means of the absorbent article and/or the means for pumping means, if present, to contain a desiccant on the inside portions thereof. The addition of a desiccant in the valving and/or means for pumping means would act to further reduce the relative humidity of the air passing into the absorbent article, thereby allowing for the

removal of more moisture from the article as the air having a reduced humidity is passed into or through the article.

It is recognized that each of the different types of absorbent articles may necessitate different amounts of air to be forced into or drawn therefrom in order to achieve the desired reduction in liquid and vapor within the article. The desired air flow rate would, of course, also be dependent on the location of the absorbent article on the body and the use thereof. Desirably the pump or means for pumping means (which is to be operably connected to the absorbent article) is capable of adjustment so as to enable the operator to vary the air flow rate through the ~~connection~~ means for connecting. An alternative embodiment would provide for the air flow rate which passes through the ~~connection~~ means for connecting to be adjusted at the ~~connection~~ means for connecting. Again, any flow rate which will allow the desired result to be achieved may be used, provided the means for pumping means selected can achieve such a rate, however, a flow rate in the range of about 10-500 cc/min is generally effective and desired for many of the embodiments of the present invention.

Desirably this invention directs the air passed through the ~~connection~~ means for connecting into the rest of the personal care product and across the skin of the wearer. It should be noted that even a low flow rate of air passing through the ~~connection~~ means for connecting and inherently the at least one valve can greatly increase the cumulative air flow through a product since personal care products may be worn for periods of time up to four hours and longer in some cases. The air driven into the product eventually escapes, of course, either, in the case of a incontinent garment for example, through the leg or torso openings, or through the outercover if it is permeable. As indicated above, another embodiment of the present invention evacuates the air from the product and expels the evacuated air into the environment. It is contemplated that the same style means for pumping means could be used to evacuate the air from the product as to pass air into the product provided that the means for pumping means is capable of providing a vacuum or suction means as opposed to forcing or pushing air. A device which evacuates the air from the article may reduce leakage concerns where the flow of air around the leg or torso openings is in an inward direction and the possibility of fluid being forced out through the leg or torso openings is reduced.

In one embodiment, particularly suitable for use with diapers and/or incontinent products, the means for pumping means comprises a bellows which includes an air containment sack or bag. The bellows may be attached directly to the ~~connection~~ means for connecting of the product or the bellows may further comprise piping or tubing to permit the connecting of the bellows to the ~~connection~~ means for connecting and the article.

The air bag may be made out of any suitable air impermeable material. Such materials include polyolefin films and coated nonwoven fabrics. A bag made from polyethylene film would be quite suitable and inexpensive for this application. A nonwoven fabric, for example, a fabric made by the meltblowing process, and coated with a latex layer would also be suitable. Latex would be a good coating candidate because of its inherent flexibility. Extrusion coated nonwovens, such as olefin (including waxes) films also provide a cost effective alternative. In view of the fact that the air bag of the bellows is generally air impermeable, the bellows should comprise a means for valving means having at least two one-way valves, one to allow air to enter the bag and a second through which the air will exit. The means for valving means of the bellows desirably allows air into the bag on expansion and directs it into the product upon compression. In several embodiments of the present invention, it is desirable that air be drawn into the bag from outside the product. Desirably the bag includes at least two one way valves: 1) intake air from outside and 2) discharge air into the product. Any suitable one way valve would function in this service and a suitable valve is shown in Figure 1. In Figure 1, a pliant flap 10 will be forced to move away from the opening 12 when air flows toward the flap 10 from outside as illustrated by the arrow. If air flow is reversed, the air would force the pliant flap 10 towards opening 12 and close the opening 12. Note that the closing of the opening 12 need not completely seal the bag completely air-tight, as some air may be lost through the same valve it entered. Figures 2A and 2B show another valving mechanism wherein two pliant sheets 14, 16 with openings 18 which do not overlap form the valve. Air flow is again shown by the large arrow. Figure 2A shows the pliant sheets in the open configuration and Figure 2B shows them in the closed position.

Desirably the bellows contains a resilient component which is constructed of a flexible material which will have sufficient resiliency or compression resistance to spring back into shape after being compressed by the ~~manual or mechanical means~~ means for manually or mechanically assisting passing air. The resilient component of the bellows may be elastic. One suitable material for the resilient component of the bellows is, for example, a corrugated bonded carded web of fibers. Such a material may be between 1 and 4 oz (34-135 gsm) in basis weight and have a density between about 0.01 to 0.03 gm/cc. Fibers for such a material may have a denier between about 3 and 60 dpf, desirably between about 6 and 30 dpf, and be made from thermoplastics such as polyesters, polyolefins, nylons and the like. Conjugate and biconstituent fibers are also suitable.

The shape and size of the bellows will vary based on the size of the wearer and product and the particular personal care product into which it is incorporated. Figure 3

shows a bellows 20 having outer surfaces 22, 24 which contain a resilient component 26 between them. Each of the outer surfaces 22, 24 incorporates a one way valving arrangement. Although a variety of configurations are possible, the intake valve (not shown) is located on outer surface 22, and outlet valve 28 is shown as being on outer surface 24. Optional tubing 30 is also shown in Figure 3. The tubing 30 should extend from the bellows 20 to the ~~connection~~ means for connecting (not shown) of the product.

As discussed above, it is contemplated that the optional pump or means for pumping ~~means~~ may take a variety of shapes and sizes depending on the size, type and shape of the product it is used with. For example, if the means for pumping ~~means~~ were being used in the waist location of a garment such as a diaper or incontinence product, the pump could be rectangular, oblong or oval and arranged so that the long dimension is across the belly of the wearer while wearing the garment, as illustrated in Figure 4. The discharge of the means for pumping ~~means~~ would pass through the ~~connection~~ means for connecting into the product and can be passed directly into the waist area of the wearer, or, to increase the amount of air going deeper into the product, can be directed by some ~~distribution~~ means for distributing, e.g. tubes or piping, to the crotch, back, or other area. Such ~~distribution~~ means for distributing need not be rigid and may collapse when air is not flowing therethrough. Further, multiple outlets may be incorporated into the means for valving ~~means~~ and/or distribution tubing which conveys air passing through the ~~connection~~ means for connecting into the product, so that air may be distributed in a particularly desired pattern within the product.

Figure 4 shows an embodiment of the present invention with a self-contained external bellows attached to the product. Figure 4 shows an outside view of one example of a diaper 36 with a bellows 20 attached thereto. The diaper 36 includes a bodyside liner or topsheet 37 and an outercover or backsheet 39 which are sealed about the periphery so as to encapsulate an absorbent core (not shown). The bellows 20 is located in the waist area on the exterior of the diaper 36 between the attachment areas 38 for the "ears" 40 of the diaper 36. The intake valving 42 of the bellows 20 is located on the front of the diaper 36. Figure 5 shows a view of the inside of a diaper showing the discharge valving 44 which is located on the inside (toward the wearer) of the product. ~~Connection~~ means for connecting 32 and valving or ~~distribution~~ means for distributing 34 are also shown in Figure 5.

In use, in the case of a diaper 36 or incontinence garment for example, the waist bellows deflates when the wearer or a third party compresses the bellows. Since the intake valve will close as the bellows is compressed, the deflating bag pushes its air out of the second one way (discharge) valve 28 in Figure 3 and 44 in Figure 5 and into the

garment. As pressure on the bag of the bellows is released, the bag will begin to inflate pulling air into a first one way (intake) valve and the bag from the outside. It is envisioned that a mechanically assisted means for pumping ~~means~~ may also be used. Desirably a small battery operated pump unit 50 would be used, the pump unit would have an intake valve and an outlet valve. The unit may be programmed by the wearer, a third party or may be pre-programmed such that at the desired interval, the unit 50 would cause air to enter the system via the unit intake valve, pass through the outlet valve of the unit, through optional tubing 54 if necessary, and through the ~~connection~~ means for connecting 32 of the absorbent article and into the desired regions of the article. One skilled in the art would recognize the pump unit could be programmed so that a specific flow rate of air is passed into the absorbent article. One skilled in the art would also recognize that any other commercially available pump or means for pumping ~~means~~ which would accomplish the desired task of passing air into the article could be used. Smaller units could be attached to the personal care product by any suitable attachment means such as a hook and loop means or to the wearer's clothing by way of a clip or the like. It is contemplated that pumps which are similar in size and shape to insulin pumps, which some diabetics must use, could be used and desirably would be of minimal hindrance to the wearer. One skilled in the art would recognize that while a smaller unit would be desired so as not to restrict the wearer's motion or otherwise hinder the wearer's movement, larger, less portable or non-portable units could also be used. Such less portable units (e.g. large air tanks, compressors, or permanent air supplies or vacuum lines) are more likely to be used in a hospital setting or the like. As indicated above, other alternative means for pumping ~~means~~, such as air lines commonly found in hospitals or similar care facilities, would also be suitable.

Other alternatives include a pump or means for pumping ~~means~~ positioned in the leg location of a personal care product. For example, the pump or means for pumping ~~means~~ could be tubular in shape and arranged to run along the leg opening of a product, and could be mounted to the article or to the wearer's clothing. This pump or means for pumping ~~means~~ could intake air through one way valves at either or both ends and discharge it through second one way valves into the central area of the product, and be activated by , manual, remote or mechanical means. The pump or means for pumping ~~means~~ would operate in substantially the same manner as a pump or means for pumping ~~means~~ located elsewhere, however, a pump or means for pumping ~~means~~ located in the leg region of a garment type product may afford discreteness not otherwise offered by other pump or means for pumping ~~means~~ locations.



It is contemplated that the optional pump or means for pumping means may be permanently fixed to the absorbent article and thus disposable, or that all or part of the pump or means for pumping means may be reused or used with or in connecting with multiple products.

Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the following claims. ~~In the claims,~~ It is Applicants' intention that means plus function claims are intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures. Thus although a nail and a screw may not be structural equivalents in that a nail employs a cylindrical surface to secure wooden parts together, whereas a screw employs a helical surface, in the environment of fastening wooden parts, a nail and a screw may be equivalent structures.

It should further be noted that any patents, applications or publications referred to herein are incorporated by reference in their entirety.

**ABSTRACT OF THE DISCLOSURE**

An absorbent article that includes a topsheet, a backsheet, a ~~valving means~~ valve, and a ~~connecting means~~ which permits the connecting of a ~~pumping means~~ pump is described. The ~~valving means~~ valve allows air to be distributed into one or more regions of the article, for example, between a wearer's skin and the article.

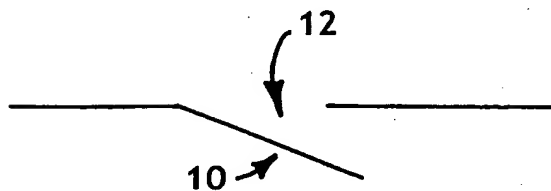


FIG. 1

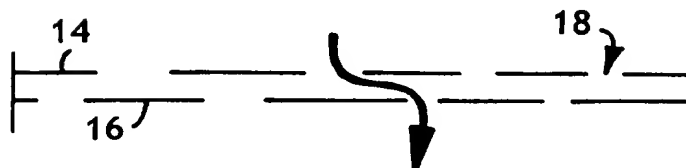


FIG. 2A




FIG. 2B

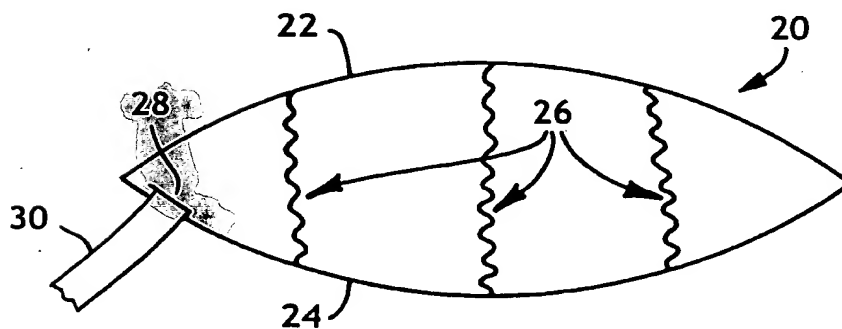


FIG. 3

*Figures 3 and 4  
only  
approved.  
1/24/03  
11-24-03*



ANNOTATED SHEET SHOWING CHANGES

"Absorbent Article With Dynamic Air Flow"

James A. Davis et al.

Docket #16,234

Serial No.: 09/866,326

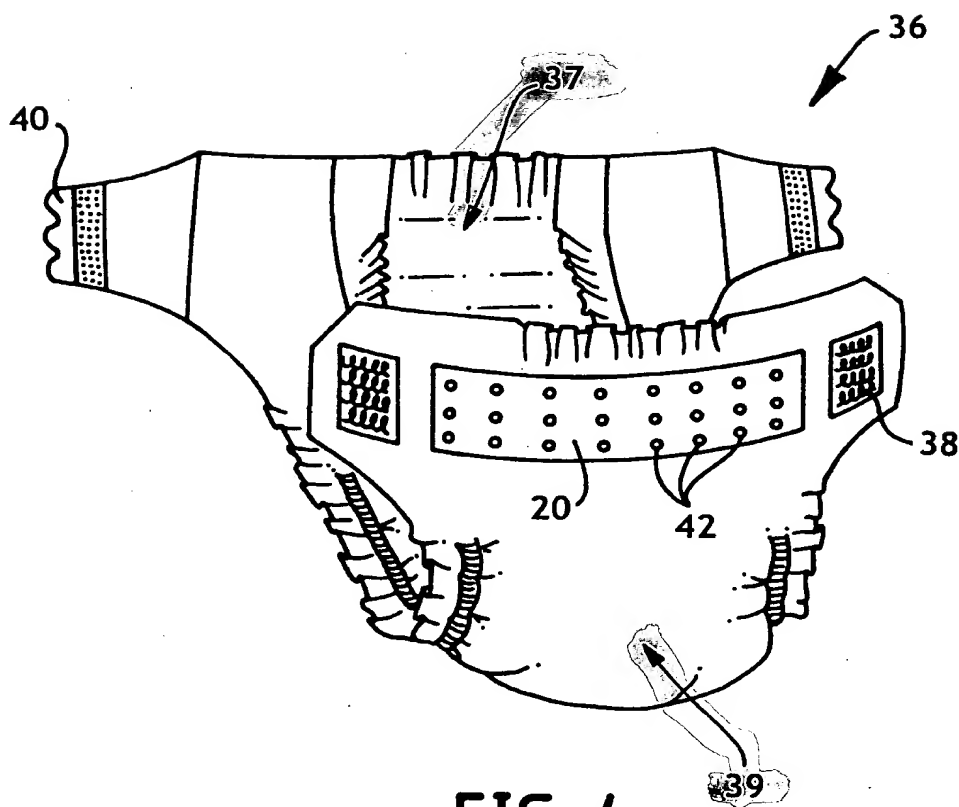


FIG. 4

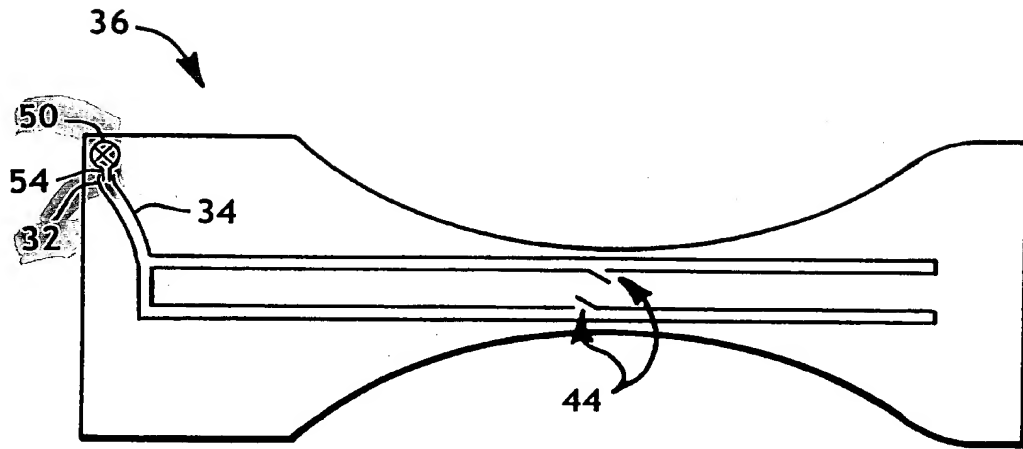


FIG. 5